




# Microsoft Surface 3 Kickstand Replacement

How to replace the kickstand on the Surface 3. Requires removing the battery and the display.

Written By: Harold Hall

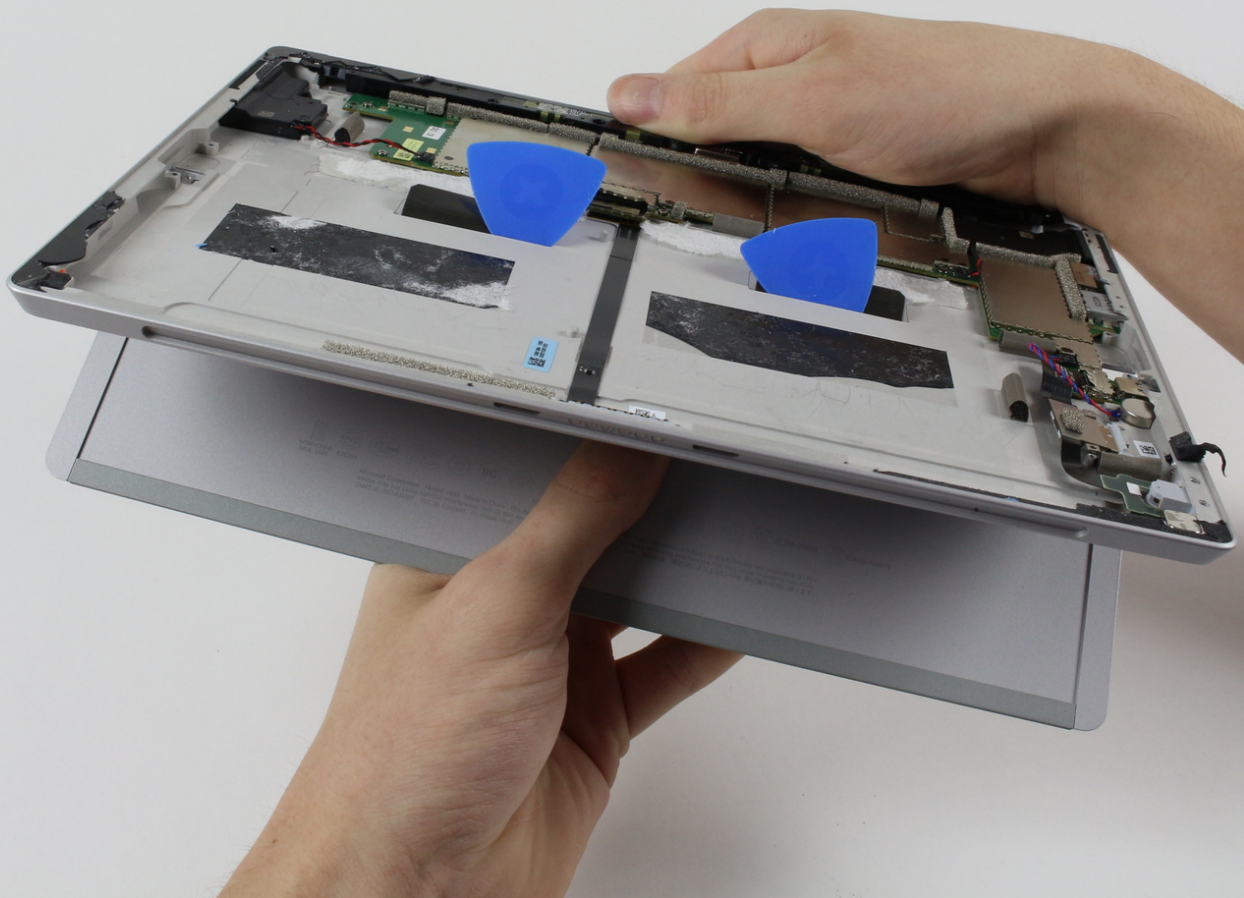

## INTRODUCTION

Replacing the kickstand is one of the simplest things to fix in a Surface 3. However, you will still need to take off the display and remove the battery to fully access the parts to replace.

---



### TOOLS:


- [iOpener Kit](#) (1)
  - [Microwave](#) (1)
  - [Plastic Cards](#) (1)
  - [T5 Torx Screwdriver](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
-

## Step 1 — Casing



- Warm up an iOpener following the instructions found in the [iOpener guide](#).
- Place the warm iOpener on top of the edges of the screen. This heat will weaken the strength of the adhesive between the display and body.

## Step 2

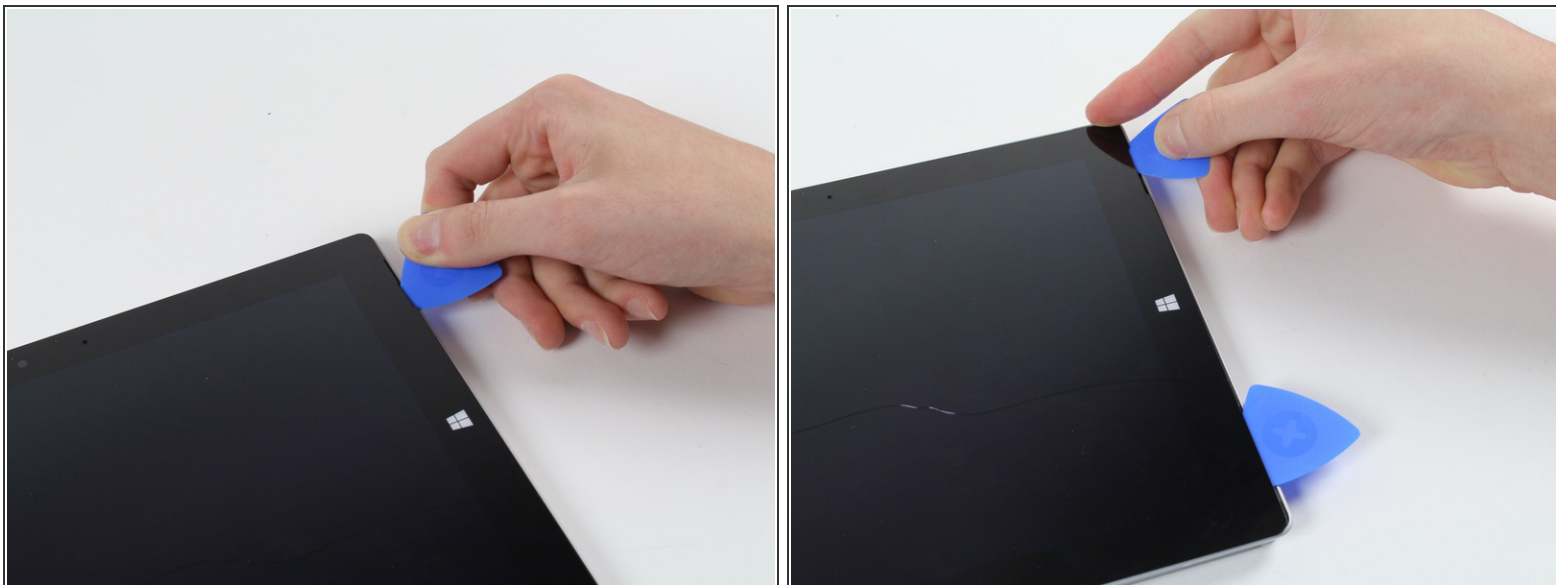

- Use iFixit opening picks to wedge under the edge of the screen at the speaker port.

*(i) This may take significant force. A fingernail might work better for the initial lift*

*(⚠) If you push straight down near the edge you will go through the speaker mesh and possibly end up damaging your speaker; try to push the pick in at a shallow angle.*


## Step 3



- Carefully try to work your way around the device using the picks, reapplications of the heated iOpener, and luck.
  - ⓘ If you break the glass on one side you might want to try again starting from the other side so that you have a clean, unbroken, edge on that side.
- ⚠ While the glass on this display is not particularly sharp when broken, it is still broken glass and you should be careful with it.



## Step 4

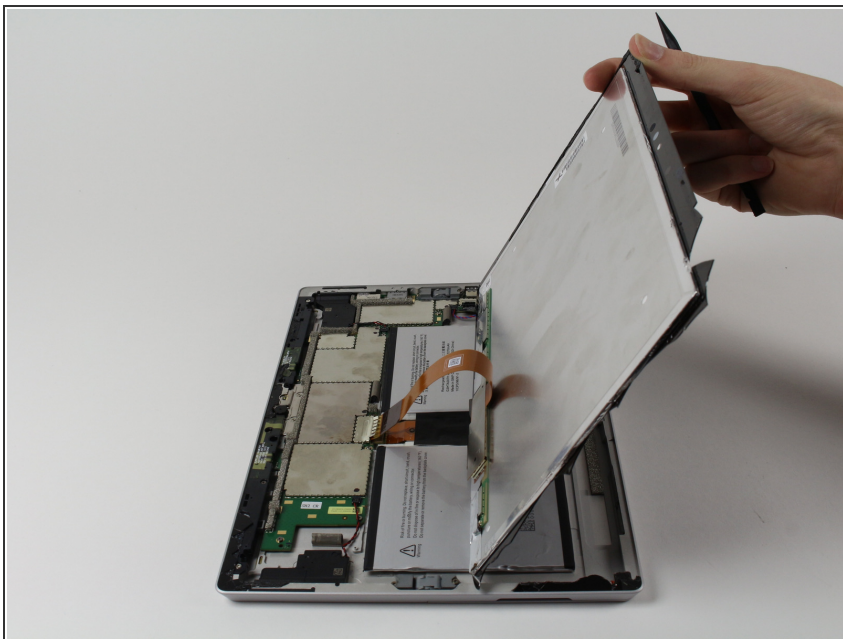



- Flip the display over so that parts underneath it are easily accessible.
- ⚠ Do not pull out the display as it is still attached to the motherboard.
- ⓘ If you are replacing the display, or want it out of the way, continue with the [display replacement guide](#) steps.

## Step 5 — Battery






- Now that you've gotten the casing off of the Surface 3, you can start removing the battery pack.

## Step 6

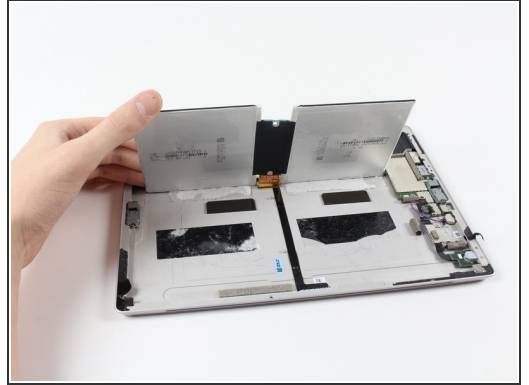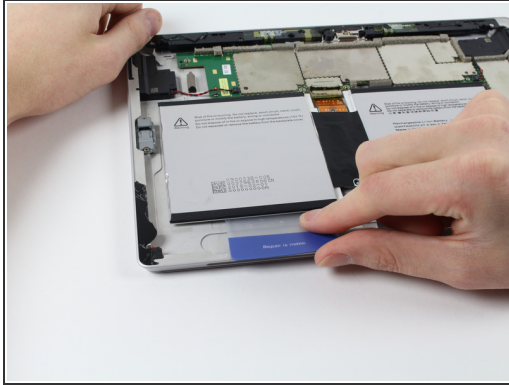

- Slide the iFixit plastic cards under the compartments of the battery pack.
- Slide the card around to undo the adhesive under the battery pack

## Step 7

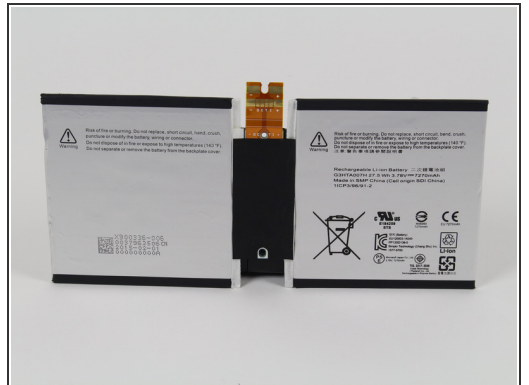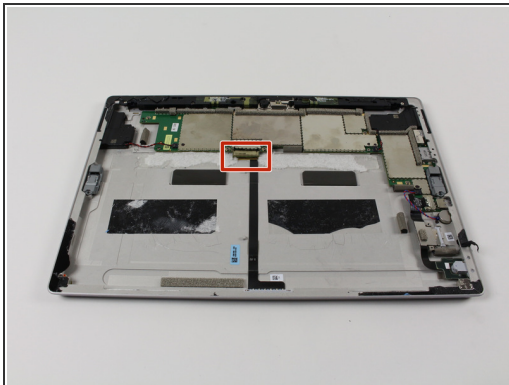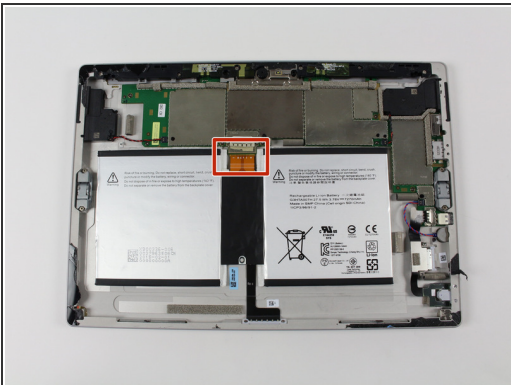

- Carefully slide the battery's flat power and data connector from its insert.
- You may now switch out the battery pack for a new one.


## Step 8 — Kickstand



- Remove these four 3/32" Torx #3 screws.

**i** If you do not need to remove the hinges, skip to the step that handles the retaining tabs.




## Step 9

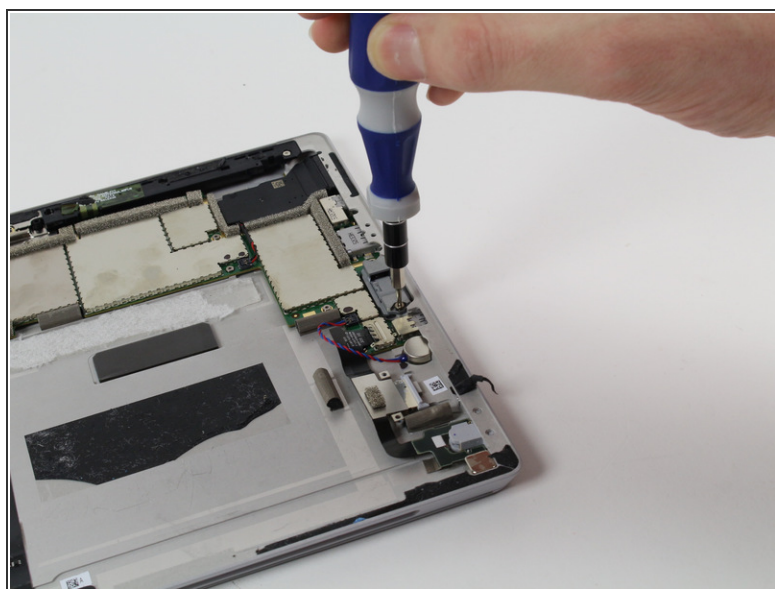

- Remove these four 3/16" Torx #5 screws that hold in the hinges to replace the hinges.



## Step 10

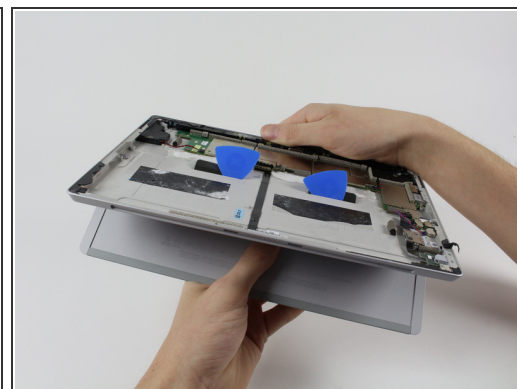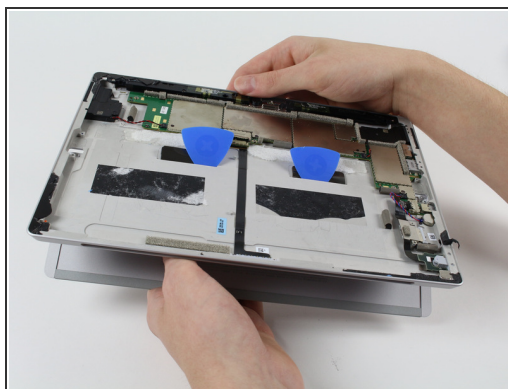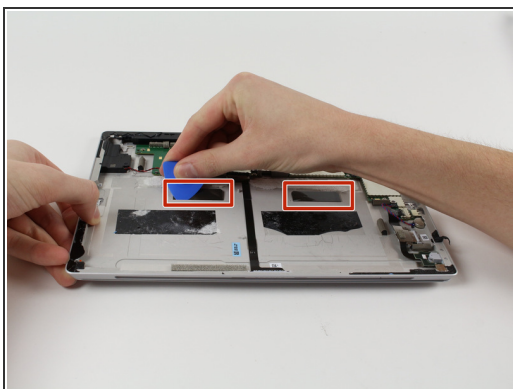

- These two retaining tabs need to be fed through the slots in the case to release the kickstand.
- Use picks to make the tab slide through the slot then simply pull out the kickstand,

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-30 03:15:41 AM.